




The most complete smart controller
for garage doors and gates.



ISG LITE
FRONT VIEW

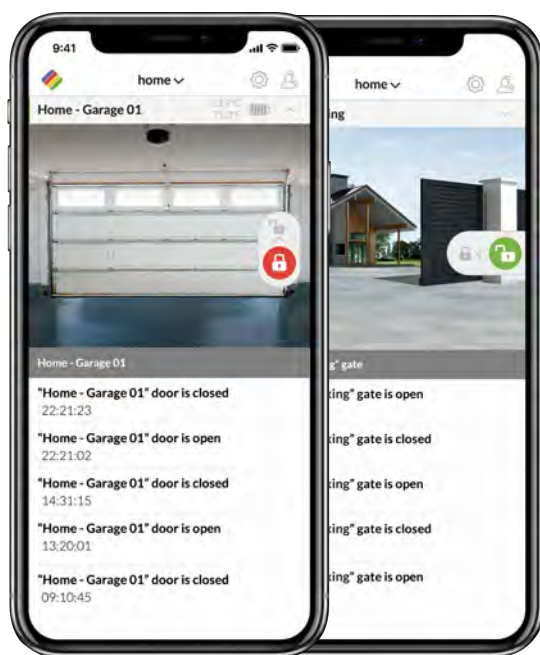

ISG APP
MAIN SCREEN (Garage)

ISG APP
MAIN SCREEN (Gate)


ISMARTGATE LITE WIFI OPENER

Universal Wi-Fi system for the remote control of one automatic garage or gate. Compatible with all major smart home platforms, ismartgate LITE also includes door status notifications, video monitoring and recording (IP camera not included), user management, multiplatform access as well as compatibility with ismartgate wireless sensors. This device can also work in remote areas without internet access. All data is stored locally, not in the cloud.



ISG LITE GARAGE KIT

ISG LITE GATE KIT



ismartgate LITE Tech Specs

Wi-Fi 2.4Ghz (802.11 b/g/n)

Relay outputs: 1, to control 1 door/ gate

Dry contact inputs: 0, no wired sensor supported

Speaker: Not included


Light: Not included

USB: type A

System: 512Mhz CPU / 4GB eMMC / 128MB RAM

Universal Power Supply: 110-240V AC (50-60 hz) to 5V2A DC

Receiver: 2401 Mhz

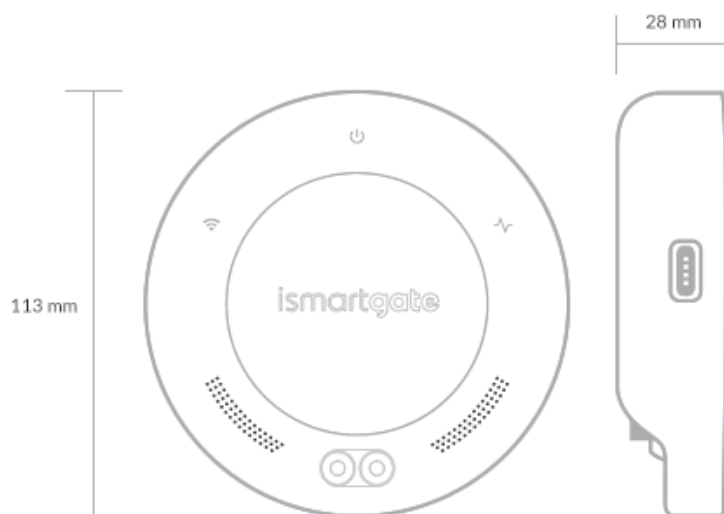

Wireless tilt sensor

Transmitter: 2401 Mhz

Type: Gravity sensor

Temperature indicator: Included


Range: 15m (50ft)

Operating temperature: -25°C / 70°C

Batteries: 2x Type-N (1.5V)

Life span: 12 - 18 Months

Waterproof: Yes

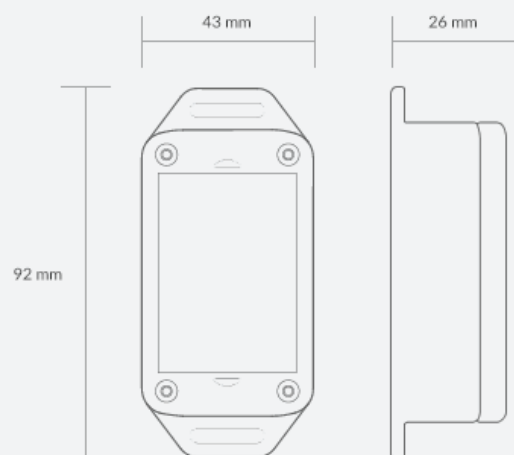

Wireless magnetic sensor

Transmitter: 2401 Mhz

Type: Magnet

Temperature indicator: Included

Range: 15m (50ft)

Operating temperature: -25°C / 70°C

Batteries: 2x Type-N (1.5V)

Life span: 12 - 18 Months

Waterproof: Yes

